
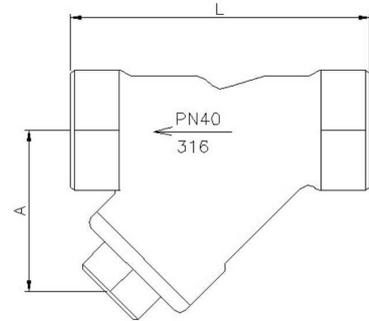


## Threaded ends "Y" Strainer

### Features

1. "Y" Strainer.
2. Threaded ends according DIN 2999 Std.
3. Made of Stainless Steel CF8M.
4. Max. Working pressure 40 Kg / cm<sup>2</sup>.
5. Working temperature -30 °C + 240 °C.




N°	Name	Material	Surface Treatment
1	Body	Stainless Steel CF8M	Shot Blasting + Pickling
2	Strainer	Stainless Steel CF8M	-----
3	Gasket	PTFE	-----
4	Plug	Stainless Steel CF8M	Shot Blasting + Pickling


### GENERAL DIMENSIONS

Medida/Size	PN	Dimensiones/Dimensions (mm)				Peso/Weight (Kg)
		A	L	Ø d	e	
1/4"	40	30	65	1	1	0.29
3/8"	40	30	65	1	1	0.21
1/2"	40	40	65	1	1	0.22
3/4"	40	45	80	1	1	0.35
1"	40	55	90	1	1	0.66
1 1/4"	40	65	105	1	1	0.77
1 1/2"	40	70	120	1	1	1.15
2"	40	85	140	1	1	1.76

**Mesh detail:**

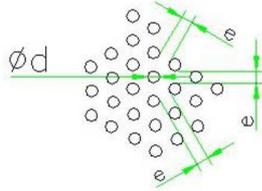

**HEAD LOSSES DIAGRAM**

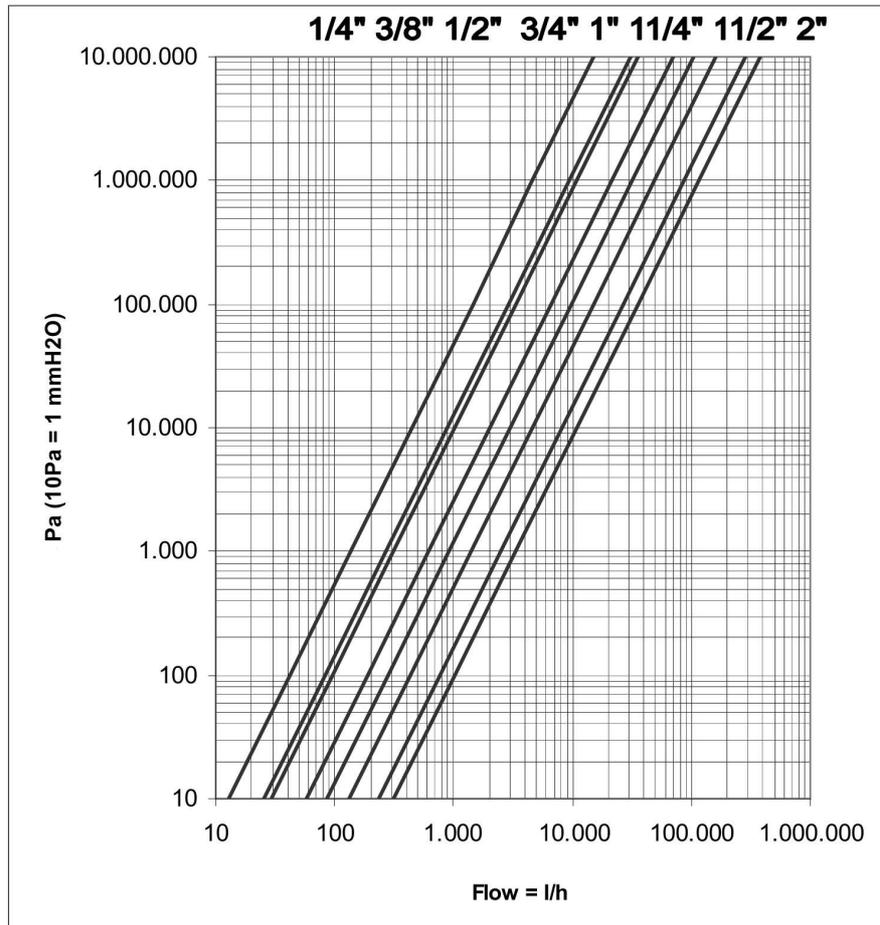

D	Inch	1/4"	3/8"	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"
Kv	m <sup>3</sup> /h	1,44	2,88	3,30	6,60	9,70	14,90	26,60	35,40